

Submittal Data: E2-HW-230V-15A

PTAC Hardwire Kit

Job Name _____ Location _____ Date _____

Purchaser _____ Engineer _____

Submitted To _____ For Reference Approval Construction

Schedule No. _____

GENERAL FEATURES

- Field Installed 208/230V 15 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.



Specifications

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green


Electrical:
 Voltage Rating: 208/230v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length 36.0-in
 Height 3/8-in
 Depth 3/8-in
 Weight 0.5-lbs

Shipping Dimensions

Length 15.0-in
 Height 2.5-in
 Depth 15.0-in
 Weight 0.5-lbs

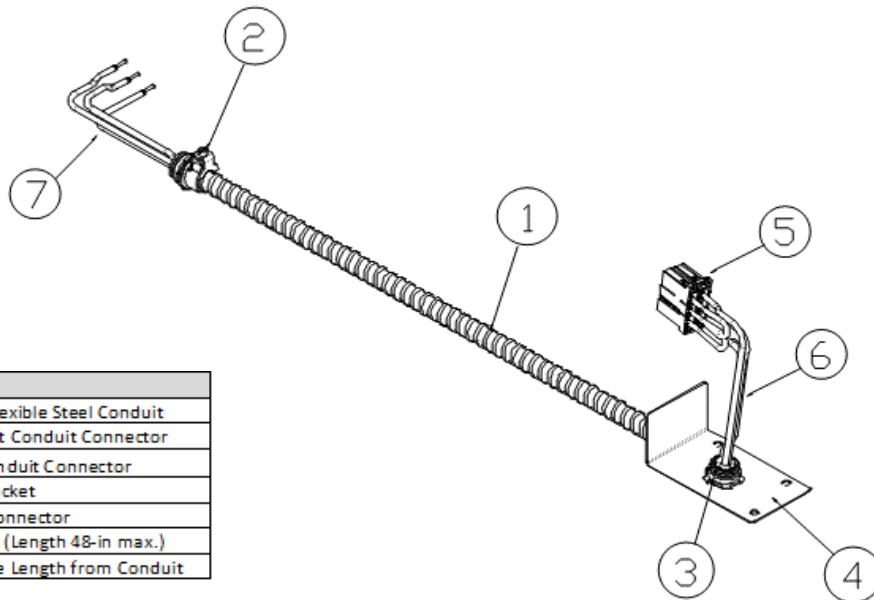

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-230V-20A

PTAC Hardwire Kit

Job Name Location Date

Purchaser Engineer

Submitted To For Reference Approval Construction

Schedule No.

GENERAL FEATURES

- Field Installed 208/230V 20 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.



Specifications

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green


Electrical:
 Voltage Rating: 208/230v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length 36.0-in
 Height 3/8-in
 Depth 3/8-in
 Weight 0.5-lbs

Shipping Dimensions

Length 15.0-in
 Height 2.5-in
 Depth 15.0-in
 Weight 0.5-lbs

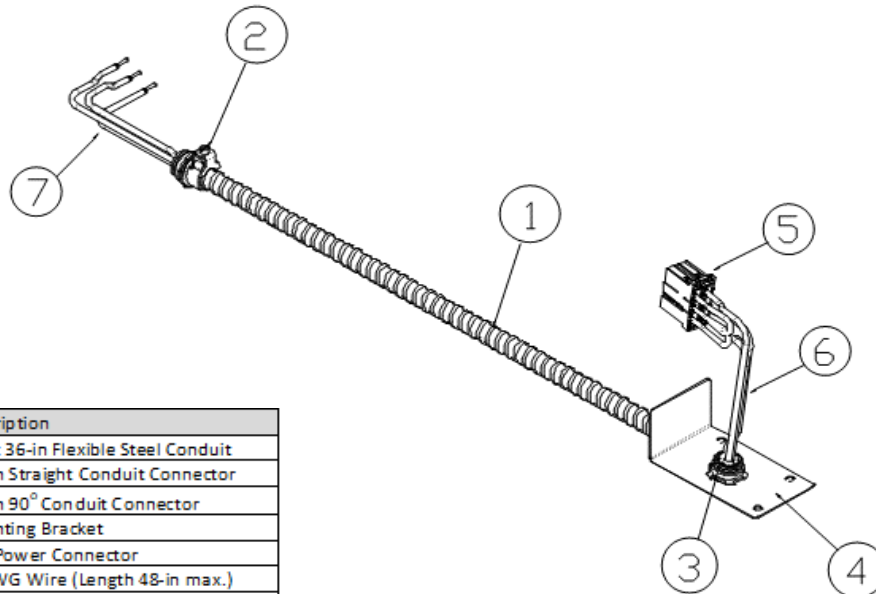

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-230V-30A

PTAC Hardwire Kit

Job Name Location Date

Purchaser Engineer

Submitted To For Reference Approval Construction

Schedule No.

GENERAL FEATURES

- Field Installed 208/230V 30 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green


Electrical:
 Voltage Rating: 208/230v
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

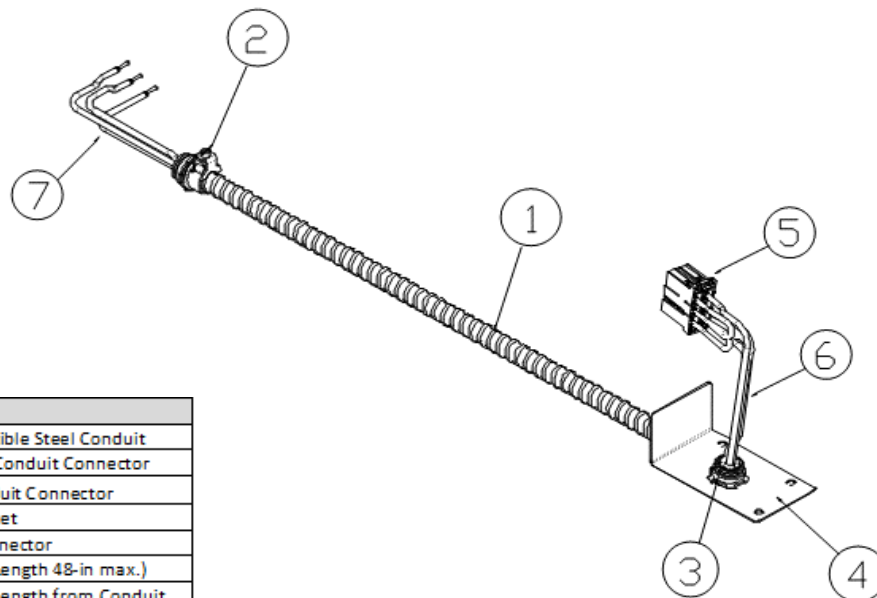

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.